Brand guidelines

Roomie



Edition 01 · 2026

Inside

Contents

01 Our brand 03

02 Logo 07

03 Mascot 14

04 Colour 18

05 Typography 22

06 Components 25

07 Voice 28

08 In use 31

01

Chapter 01

Our brand

Our story

Sharing a home is easy. Sharing the chores isn't.

The tension

When schedules shift, one person quietly picks up the slack, and asking for help starts to feel like blame.

Our answer

Roomie weighs chores by effort, plans around busy days and moves missed ones to a pool anyone can claim.

The result

Fairer weeks, fewer awkward talks, and a home that feels shared instead of managed.

Mission

Keep chores fair, so the people you live with stay the people you like.

Values



Fair by default

Effort levels, busy days and a shared pool. Nobody has to ask for fairness.



Calm, never nagging

Nudges are soft, specific and rare. Calm beats pressure.



Together, not ranked

The house wins as one, with shared streaks.

Personality

If Roomie were a roommate...



Warm

Never saccharine

Kind and human, like a friend.



Fair

Never preachy

We keep track so nobody has to.



Calm

Never passive

We nudge early so nobody shouts.



Playful

Never childish

A smiling house, used lightly.

Chapter 02

Logo



Roomie

The mark

A house that smiles back.

The horizontal lockup is Roomie's signature. Use it first, use it big.

Fraunces SuperSoft · Bold · −1% tracking

Anatomy

Built from the house.

1

The sprout

It grows with every streak the house keeps.

2

The roof

Lavender shelter.
Soft corners, nothing sharp.

3

The smile

Two dots and a curve.
Calm, never cartoonish.

4

The wordmark


Fraunces SuperSoft.
Soft serifs echo the roof.



Clear space & minimum size

Give it room to breathe.

Measure the logo's height and split it into four: one part is x. Keep x clear on every side. Nothing enters it, not text, not edges, not other logos.

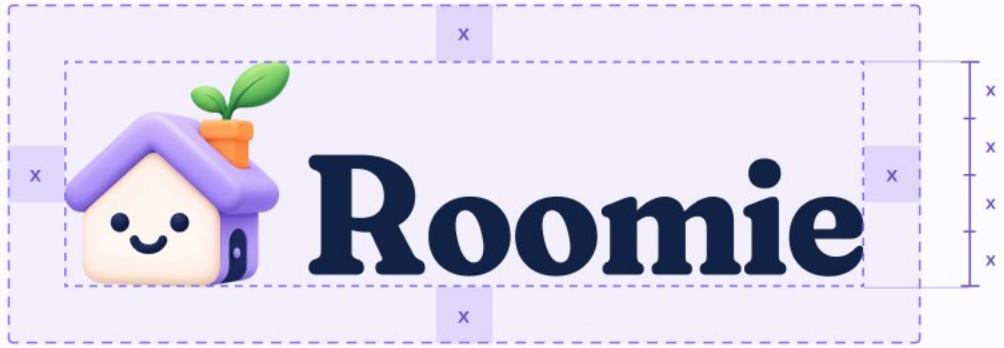

x = ¼ of the logo's height. A logo 160 px tall needs 40 px of clear space.



32 px
Smallest on screen



12 mm
Smallest in print



40 px
Symbol alone, app & favicon

Versions

One logo, four outfits.

Pick the version that keeps the most contrast with what sits behind it. When in doubt, go primary on white.



Primary

On white and Paper. The default.



Reversed

On Ink and dark photos.



Stacked

Square and tall spaces.




Symbol

App icon, avatar, favicon.

Placement

Make it big. Keep it calm.


Sit the logo in a corner or on the centre line. Give it the clear zone, then let the photo or the words do the rest.

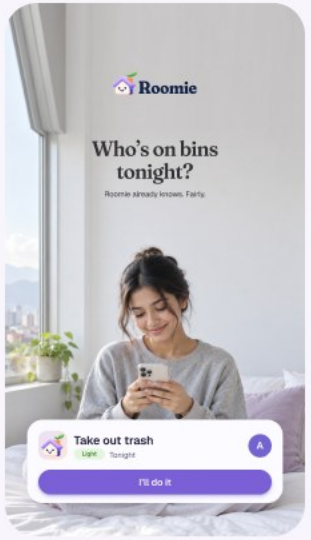

Story



Post

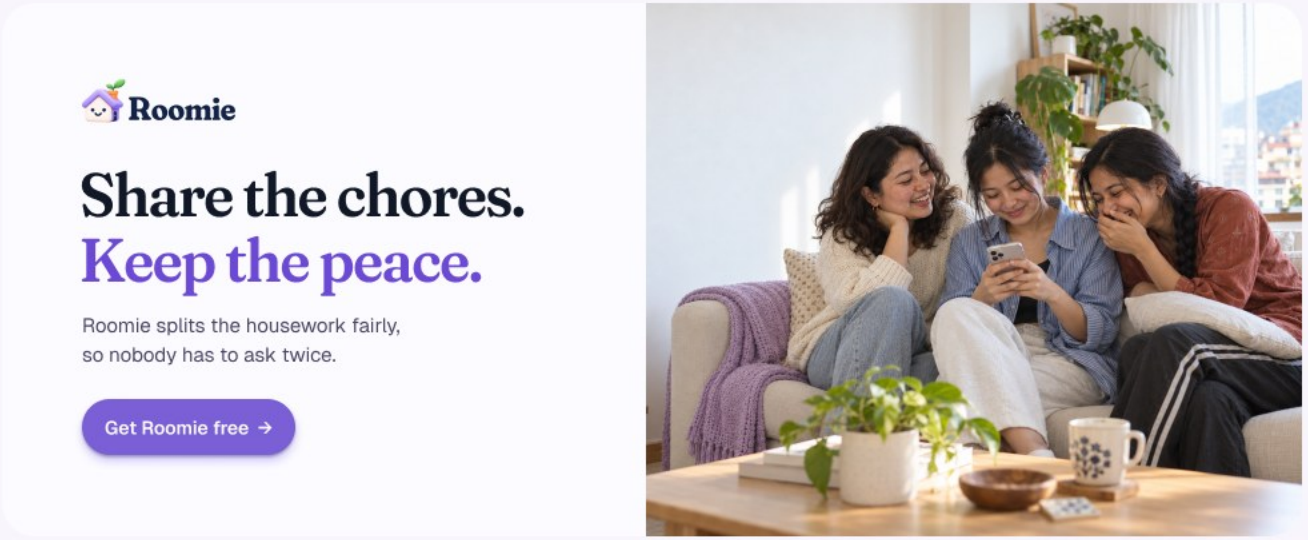

Banner

Misuse

Please don’t.

The logo is drawn once and drawn carefully. Use the files as they come, never redraw, re-colour or decorate them.



Don’t stretch it



Don’t recolour it



Don’t tilt it



Don’t rearrange it



Don’t add effects



Don’t outline it



Don’t use busy photos



Don’t use Lavender

Chapter 03

Mascot



Meet Roomie

The house that smiles.

Roomie is the home itself: soft, warm and quietly proud when everyone pulls their weight.

Warm welcome

Greets you, celebrates streaks, says thanks.

Calm, never nagging

Shows up for good news, never for blame.

Used lightly

One Roomie per screen, never as decoration.

App icon

First thing on the screen.


Roomie alone on a soft lilac-to-peach wash. No wordmark, no border, no extra shine.

Background	Wash #E9E1FB → #FFE6D6
Mascot	76% of the icon
Corners	iOS super-ellipse



Roomie



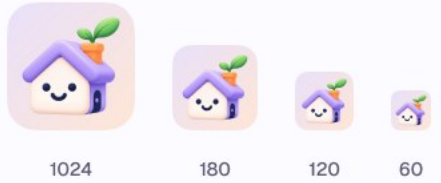

1024 180 120 60

Sizes in px

Illustration

Soft, round, a little glossy.

Everything Roomie draws looks like it was shaped from clay: soft light from the top left, rounded edges, pastel colour.

The house plant grows with the streak

Every finished day helps it grow. A missed chore only makes it droop, it never dies.



Seed
Day 0



Sprout
Day 1



Leafy
Day 7



Bud
Day 14



Bloom
Day 30



Droop
Missed a day

3D emoji for things

Chores and pantry items use soft 3D emoji on pastel tiles, one object per tile.



- ✓ Light from the top left
- ✓ Rounded, soft, slightly glossy
- ✓ Terracotta and Sprout live only here
- ✗ No flat clip-art or outlines
- ✗ No sad or angry faces

Chapter 04

Colour

Palette

Borrowed from the house.

Ink carries the words, off-white gives them room, and one flat roof violet makes it Roomie. The roof-to-chimney blend marks whatever you select. Nothing is ever pure white.

Ink
Text, icons, toasts.

#1F1B3A

Off-white
Cards and sheets. Never pure white.

#FCFBFF

Mist
The page behind everything.

#F8F6FC

Roof violet
The one action per screen.

#7A5FD6

Violet deep
Links and selected text.

#6E52C9

Plum
The streak number.

#3B2470


Lilac
Tints and the active tab.

#EFE9FD

Roof → chimney
Selected outline and the + button.

#A489ED → #FFB48A

Proportion



Off-white and mist 60% · Ink 20% · Violet 12% · Accents 8%

Functional colour

Colour that means something.

Ink greys do the quiet work. Effort tags use soft fills with dark text. Peach belongs to the shared pool, and terracotta and sprout live only in the illustrations.

Neutrals

Ink 700
#4B4566
Body text

Ink 500
#5E5873
Secondary text

Ink 300
#8A8599
Icons, hints

Lilac 50
#F3EFFC
Fields, chips

Lilac 200
#E9E4F6
Borders

Effort tags

Light
Fill #E9F6E1
Text #3F7A2A
4.7 : 1 · AA

Medium
Fill #FFF1D6
Text #8A5A00
5.3 : 1 · AA

Heavy
Fill #FFE6DC
Text #B23E1E
4.9 : 1 · AA

Shared pool

Shared pool

Peach #FFE3D3 with text #9A3412. Used for the pool banner tile and the Out tag.

Illustration only

Terracotta
#FF9B60
The chimney pot.

Sprout
#8DD471
The sprout and plant.

Pairs that pass

Aa — **Ink on off-white**
16.0 : 1 · AAA

Aa — **Off-white on roof violet**
4.6 : 1 · AA

Aa — **Plum on lilac**
10.6 : 1 · AAA

Aa — **Ink 500 on mist**
6.3 : 1 · AA

Colour in use

A room, not a rainbow.

Photography and layouts follow the same split: bright rooms, one lilac moment, a warm touch of peach, a single green sprout.

- **Off-white** #FCFBFF
- **Mist** #F8F6FC
- **Roof violet** #7A5FD6
- **Peach** #FFE3D3
- **Ink** #1F1B3A



Chapter 05

Typography

Aa

Fraunces Soft

SemiBold · Screen titles, greetings and the one italic accent word

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
0123456789 ’ “ ” ? ! & –

Aa

Geist

Light · Regular · Medium · SemiBold · Everything you read and tap

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
0123456789 ’ “ ” ? ! & –

Aa Regular **Aa Medium** **Aa SemiBold**

Hierarchy

A clear pecking order.

Real app sizes, shown at 150%. Fraunces speaks, Geist explains.

Page title · Fraunces SemiBold · 34

Chores

Onboarding title · Fraunces SemiBold · 28

Make your place feel like home.

Streak numeral · Geist Light · 96

8

Greeting · Fraunces SemiBold · 20

Morning, Ramesh

Button · Geist Medium · 17

Create my account

Body · Geist Regular · 15

Share the chores, share the snacks.

Row · Geist Medium · 16

Sweep living room

Section · Geist SemiBold · 20

Your tasks today

Meta · Geist Regular · 13

Heavy chores skip your busy days.

Tag · Geist SemiBold · 12

Light


Chapter 06


Components


Building blocks

Same blocks, every screen.

Glass cards, pill shapes, one flat violet action, and a lilac-to-peach outline for whatever is selected. Shown at 125%, straight from the v2 library.

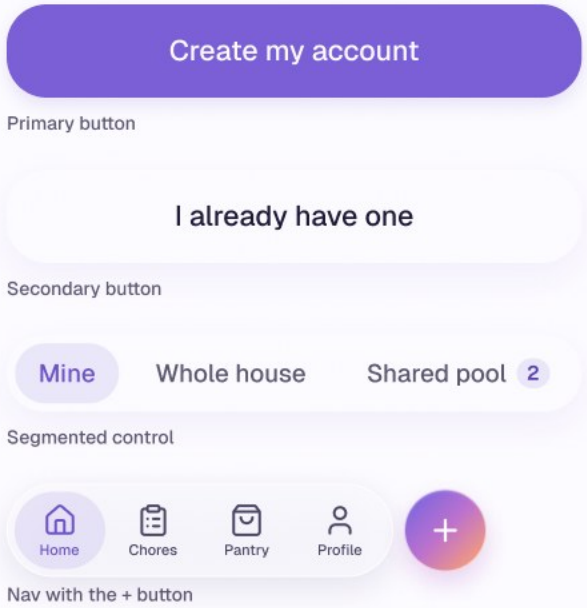

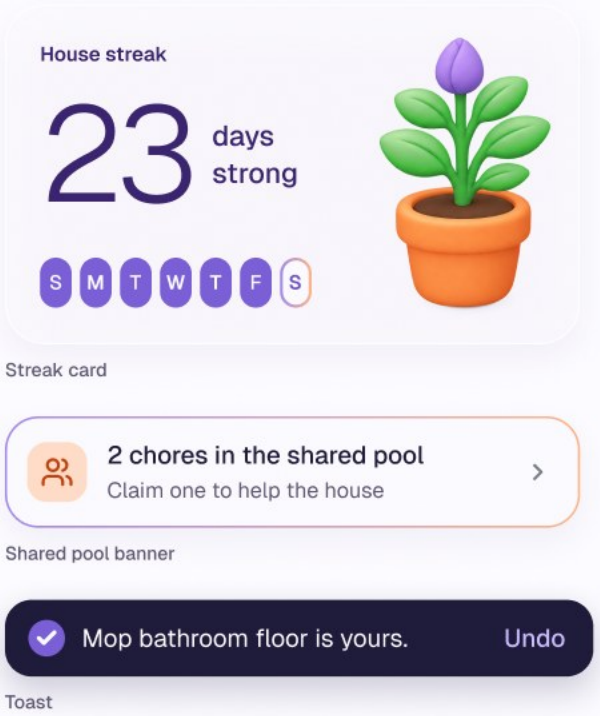

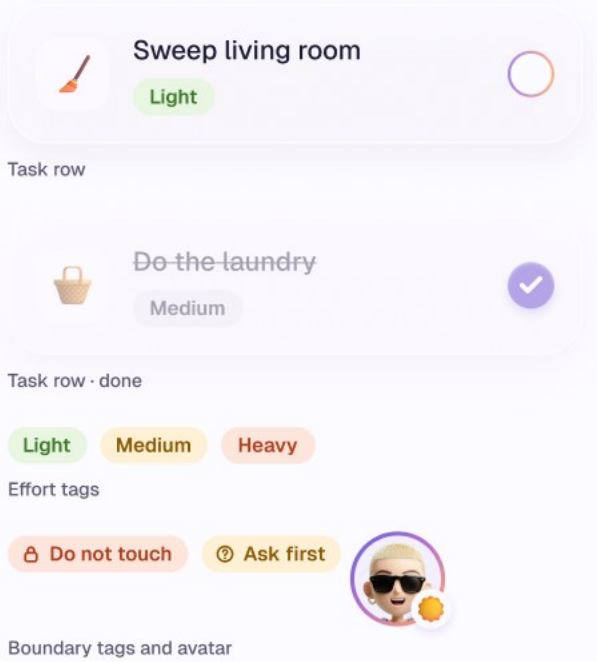


Iconography

Two kinds of icon.

Emoji for things, line icons for actions. Never mix them in the same place, and never redraw them by hand.

Thing emoji

For chores and pantry items. Fluent 3D emoji on a soft off-white tile. 118 in the library, and a letter tile when nothing fits.



Tile	44 px tile, 11 px corners
Emoji	60% of the tile
Use	One object per row

UI icons

For navigation and settings rows. Line icons, never filled. The + button is the one gradient.



Size	24 px, 1.5 px stroke
Colour	Violet deep active, ink 500 resting
Tap area	44 × 44 px minimum

07

Chapter 07

Voice

Voice principles

Kind, clear, never bossy.

Roomie talks like the flatmate everyone wishes they had. Every “We say” line is real app copy.

Blame-free

Chores move, people don’t get called out.

We say

“Chores that slipped through.
Claim one to help out.”

Not

~~“You missed taking out the trash again.”~~

Specific, not shouty

Say what, when and who. Skip the alarms.

We say

“Wash dishes is due today at 7 pm.”

Not

~~“URGENT: You have overdue chores!”~~

Celebrate together

The house wins as one. Nobody is ranked.

We say

“All done for today.
The house is on track for week 9.”

Not

~~“You beat Aman this week!”~~

Words we use

Small words, big difference.

We say	Instead of
House	~~Group, household, users~~
Roommates	~~Members, participants~~
Shared pool	~~Overdue tasks, backlog~~
Help the house	~~Unassigned~~
Claim	~~Accept task~~
Nudge	~~Alert, warning, reminder~~
Running low	~~Out of stock, low inventory~~
Ask the house	~~Submit request~~

Two nudge tones

Each person picks theirs in setup. Same fact, different warmth.



Motivate me

Gentle nudge

Dishes are yours tonight. Keep the streak going!



Just the facts

Wash dishes

Wash dishes is due today at 7 pm.

Never guilt, never sarcasm, never ALL CAPS.

Chapter 08

In use

In real life

Out in the world.

Roomie lives in small moments: a glance at breakfast, a nudge on the table, a check at the fridge.




Morning check

The home screen: the whole day in one glance.



A gentle nudge

Lock-screen reminders that never nag.

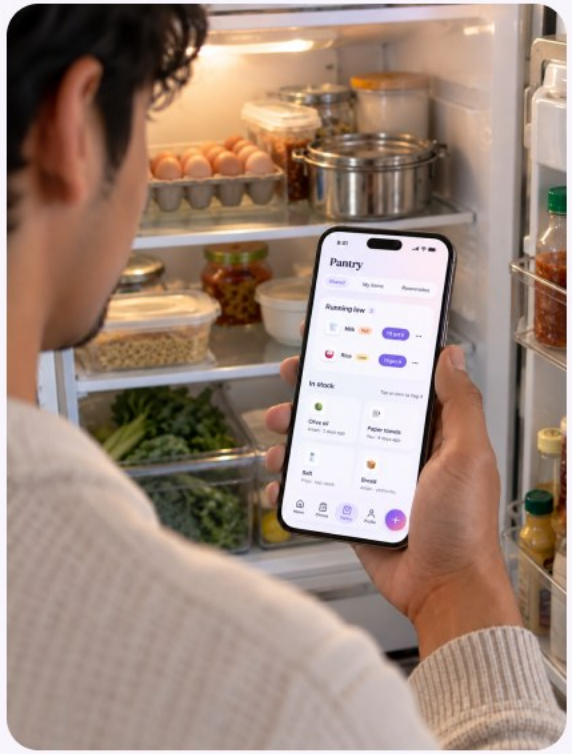

Running low

The pantry, checked at the fridge.

Photography

Bright rooms, real people.


Daylight, white walls and one lilac moment. Young Nepali flatmates caught mid-laugh, never posing for the camera.



✓ Small, warm moments



✓ Candid, mid-laugh

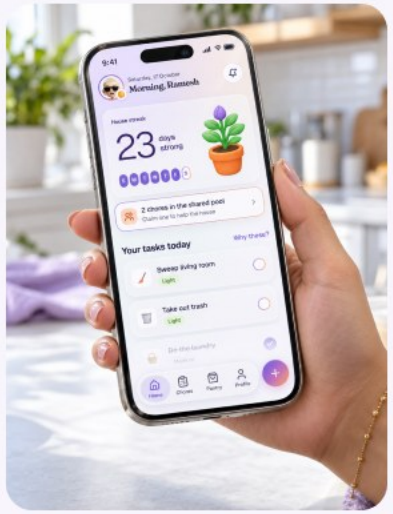

✓ Real app, added as cards



✓ White room, one lilac moment



✗ Gritty, cluttered, warm cast



✗ Dark, documentary mood


Shoot or generate with bright, cool daylight and a pastel palette of off-white, lilac and peach. The phone screen faces away from the camera; the real app is added as live cards in Figma, never drawn by the image model.

Social

A feed that feels like home.

Three kinds of tile: a real photo, a Lilac or Peach statement, or a photo with one piece of the real app. The logo lives in the profile picture.

- One idea per tile, nothing more
- Copy lives in the caption, not on the tile
- Photo, colour, photo: let the grid breathe

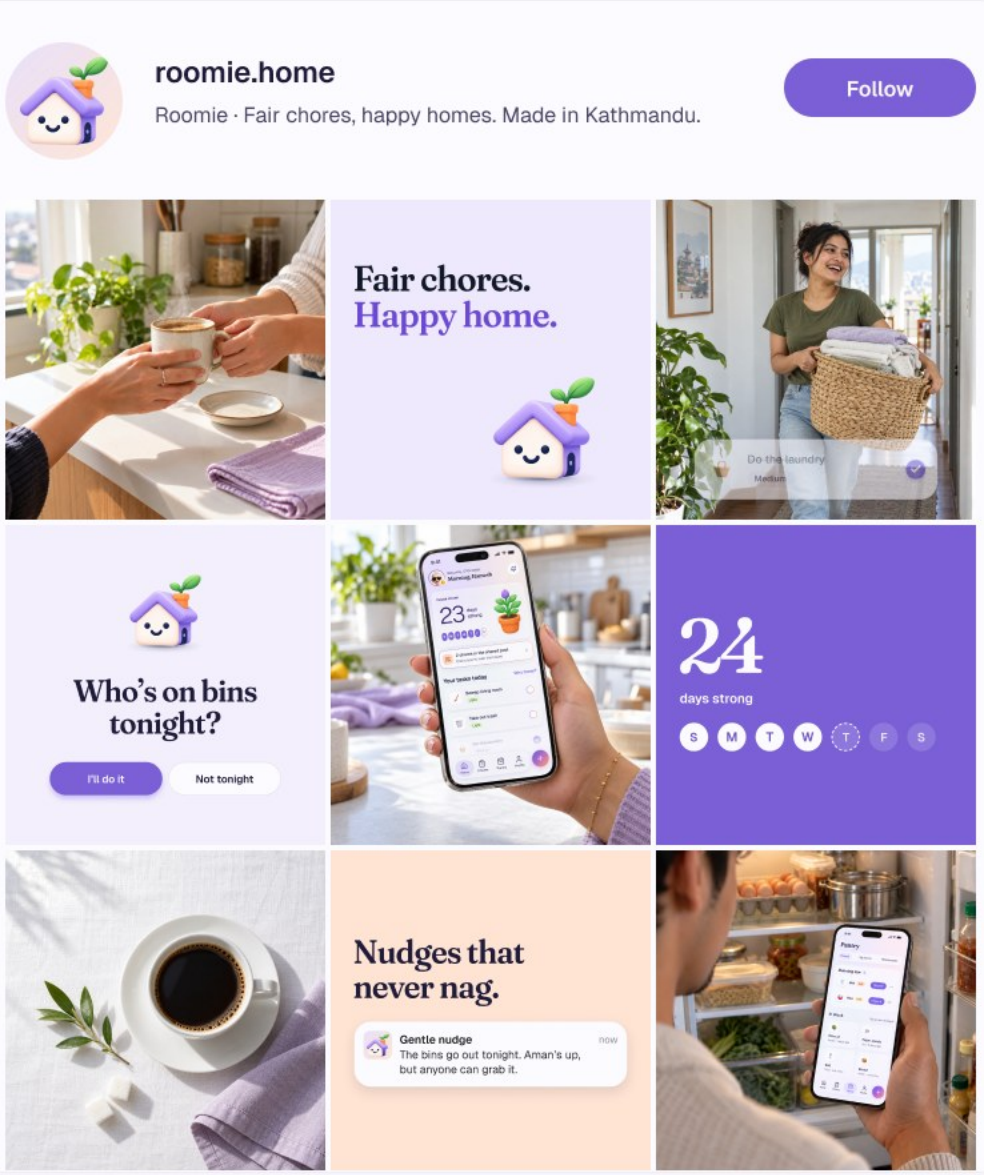

Merch

Small things, made well.

Quiet products for real homes. The wordmark prints in navy, the mascot stays small.



Canvas tote

Navy wordmark, mascot as a stitched patch.



Mug and stickers

Logo small on the mug, the mascot as die-cut stickers.

Rules

Cream, white or lilac products only

Wordmark in navy, never violet on fabric

Mascot as a patch or sticker, never a glossy print

Keep the logo small. Let the product breathe



Roomie

Make your place feel like home.

Brand guidelines · 2026